


## Communication Modules

### Serial Communication

The controller serial port is compatible with RS-232 serial communication. The serial port supports the DF1 protocol to communicate with other devices on the serial link.

Specifications [PDF]

### Example Configuration—Serial Communication

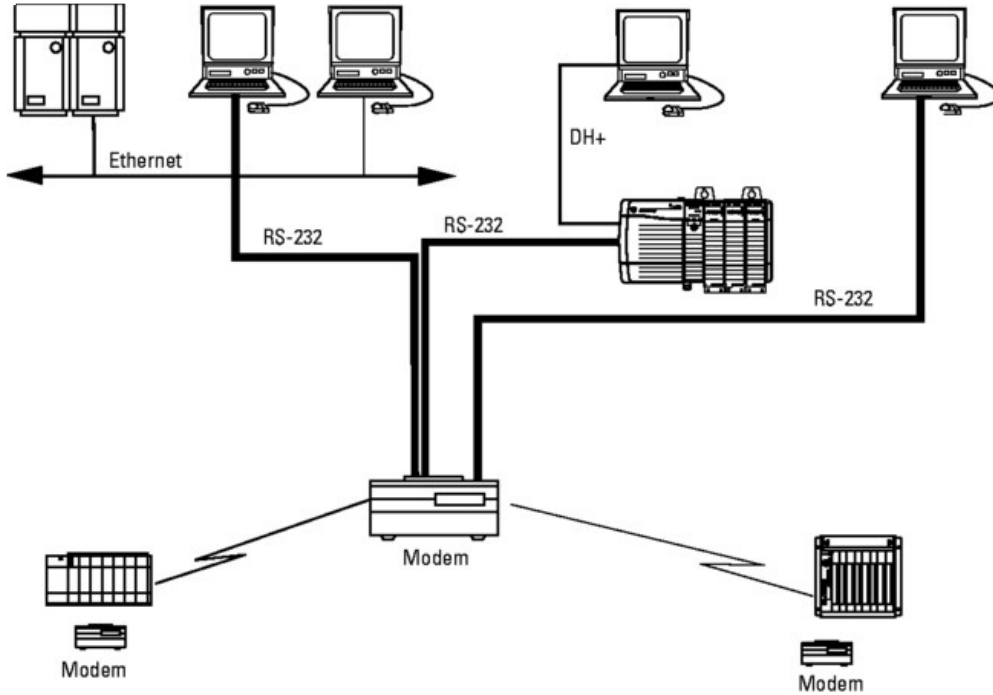

### Modbus Support

To use Logix5000 controllers on Modbus, you connect through the serial port and execute a specific ladder logic routine. The controller project is available with RSLogix 5000 Enterprise programming software. For more information, see Using Logix5000 Controllers as Masters or Slaves on Modbus Application Solution, publication CIG-AP129.

### Accessories—Serial Communication

	1756-CP3	1747-CP3
Connector Type	Female 9-pin D-shell	
Connector angle	Right angle connector to controller, straight to serial port	
Length	3 m (118 in.)	