


## Changeover Switch EF, 2P 1-0-2 32A 250/400VAC AC22A, 1..16mm<sup>2</sup>, 2M



Electrical Characteristics	
Modular size	2
Thermal current I <sub>th</sub> (40°C)	32A
Operational frequency	50 / 60 Hz
Rated operation voltage in AC	230V
Rated insulation voltage (Ui)	440V
Rated impulse withstand voltage U <sub>imp</sub>	6 KV
Load duty category (400V AC)	AC 22A/AC 22B
Rated short time withstand current 1s I <sub>cw</sub> (IEC 60947-3)	375A / 1sec
Prospective short circuit current (EN 60669)	3kA
Protection degree	2
Working temperature	-20 to 50°C
Storage temperature	-40 to 80°C

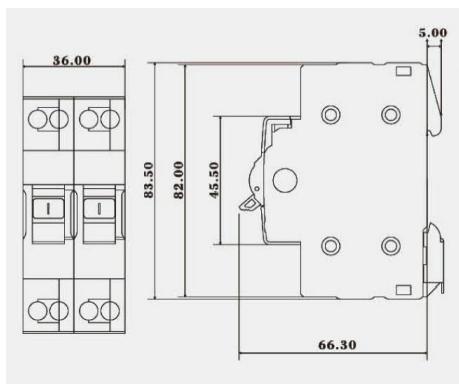

Mechanical characteristic	
Terminal capacity	16 mm <sup>2</sup>
Tightening torque	1.8 Nm
IP protection degree	20
Mechanical endurance (number of cycle)	200 000
Electrical endurance @ AC22 (number of cycles)	25 000